
SUSSEX



Product Code: DUT-04a


Duet Progressive Wall Basin Mixer System 165mm

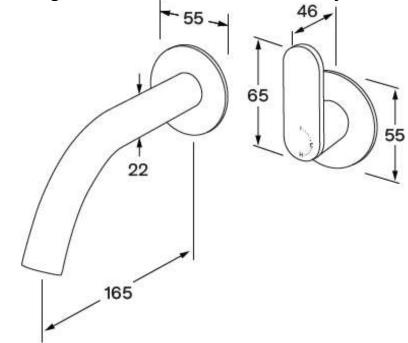

Product features	Warranty	Pressure rating	WELS rating
Designed and manufactured in Australia All brass construction Brogressius mixes base contridue	15 Year overall warranty. Refer to Warranty sheet for specific information.	300 - 500kPa	6 star - 4.5lt/min
 Progressive mixer brass cartridge Incorporating Sussex Masterfit 	appende information.	Temperature rating	
 Available in a range of high quality, durable finishe Minimal, refined design to complement any cont Matching tapware and showers 		1-65°C	ASHZO 20051
	1300 898 889	www.acsbathrooms.com.au	

As part of ACS commitment to quality products. Information provided in this data sheet is representative of the actual productt available at the time of printing. Due to our commitment to continuous product design and development, the designs and specifications depicted are subject to change without notice. Please confirm all particulars with your ACS sales consultant prior to purchase. Each product is covered by a limited warranty. Please see our website for full terms and conditions. This drawing remains the property of ACS and should not be copied or distributed without ACS consent. © 2010 All Dimensions are approximate in mm and are not to scale.

SUSSEX

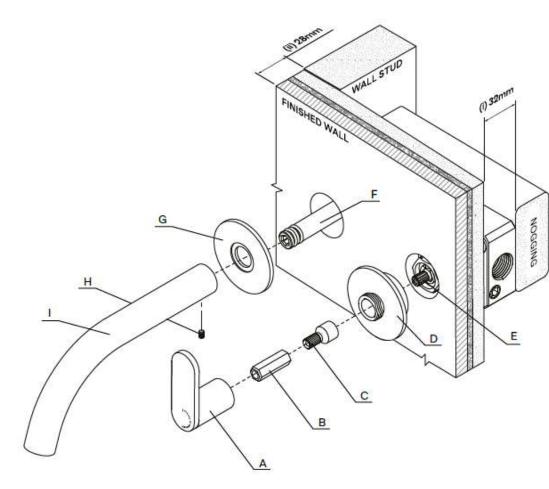

Product Code: DUT-04a

Duet Progressive Wall Basin Mixer System 165mm

Rough-in:

- The In-wall (Body Mixer) is supplied and is to be used in conjunction with this Tapware.
- Secure a nogging 32mm (i) back from the front of the stud. Attach the Wall Body Mixer to the nogging.
- Ensure the Body Mixer mounted is square and parallel between the Wall Studs.
- For the purpose of the illustration, the thickness of the finished Wall coverings is calculated to be 28mm (ii)
- See step 1 for rough in configuration.

Product parts

- (A)Handle
- (B) Spindle Adapter
- (C) Spindle Extention
- (D) Dress Ring
- (E) Spindle
- (F) Supply Post
- (G) Dress Ring (Outlet)
- (H) Set Screw
- (I)Outlet

Plumber note

- Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2021
- Recommended working water pressure 300 500 Kpa. Maximum water temperature is 65°C
- After installation, ensure that tapware functions correctly without leaks.
- Please ensure a copy of the Installation Instructions are left with the end user for future reference.

Pressure testing

On-site high pressure line testing must be conducted with the Mixer in the closed position. (STATIC TEST ONLY) Under no circumstances is the Mixer to be opened when exceeding the maximum stated water pressure. At the completion of the testing, do not relieve any high pressure by opening the Mixer.

Exposing the internals of the Mixer Cartridge to higher than specified water pressures, will void the manufacturer's warranty





1300 898 889

www.acsbathrooms.com.au

As part of ACS commitment to quality products. Information provided in this data sheet is representative of the actual product aavailable at the time of printing. Due to our commitment to continuous product design and development, the designs and specifications depicted are subject to change without notice. Please confirm all particulars with your ACS sales consultant prior to purchase. Each product is covered by a limited warranty. Please see our website for full terms and conditions. This drawing remains the property of ACS and should not be copied or distributed without ACS consent. © 2010 All Dimensions are approximate in mm and are not to scale.