

Nero

DOLCE FLOORMOUNT MIXER

•A-B902BN 2S Series Freestanding Bath Filler - Goose Neck in Brushed Nickel Finish



SPECIFICATION

WELS RATING	8.5L/MIN
WATERMARK LICENSE	WM-060073
PRESSURE RATING	MIN 150kpa - MAX 500kPa

MAINTENANCE AND CARE


All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.


Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

PACKAGING INCLUDES

- 1x mixer body ①
- 1x straight tube ②
- 1x escutcheon ③
- 2x flexible hose ④
- 1x triangle bracket ⑤
- 3x expansion screw ⑥
- 1x gloves ⑦
- 1x Manual ⑧
- 1x Allen key ⑨

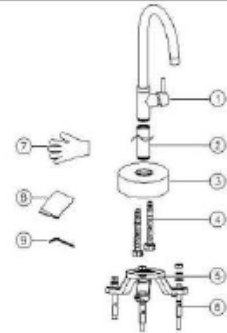

DIMENSION

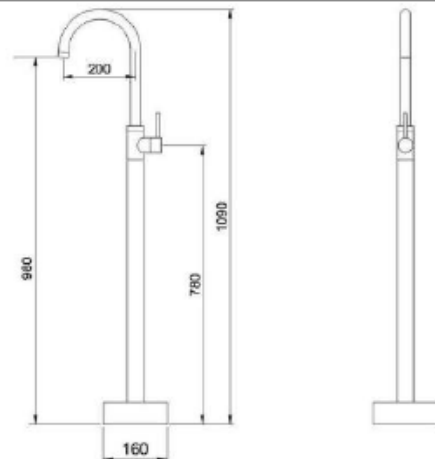

ACS


1300 898 889

www.acsbathrooms.com.au


Nero

INSTALL INSTRUCTION


Take the flexible hose through the triangle bracket, the escutcheon and the straight tube, then screw the flexible hose on to the mixer body.

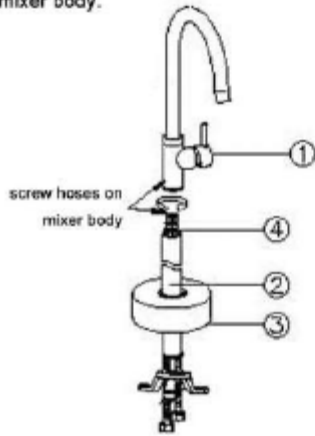


Screw the straight tube on to mixer body as the picture.

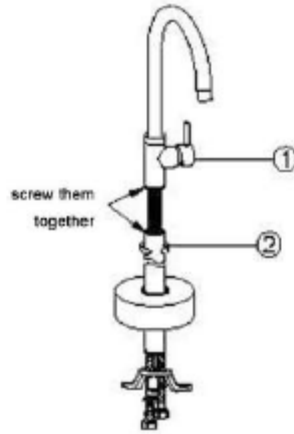


Do construction for the outlet under the floor level according to the the picture.

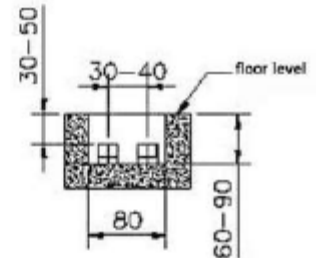


Connect the flexible hoses to the outlets.

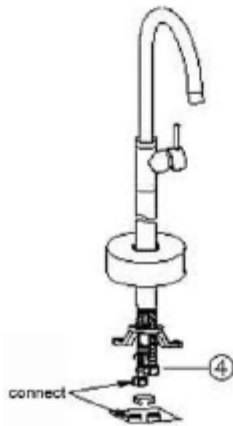


Screw the triangle bracket onto the bottom of the straight tube.

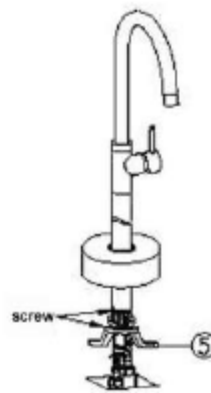

Punch holes for the triangle bracket as the picture.

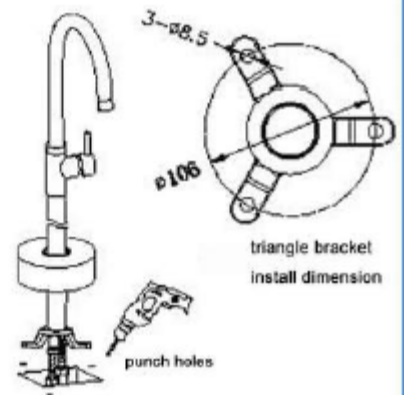

Fix the triangle bracket by expansion screws.

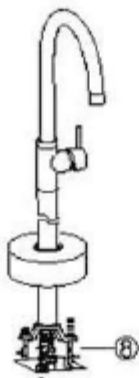

Finish

