


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Circa Wall Top Assembly
Product code: CIR-07

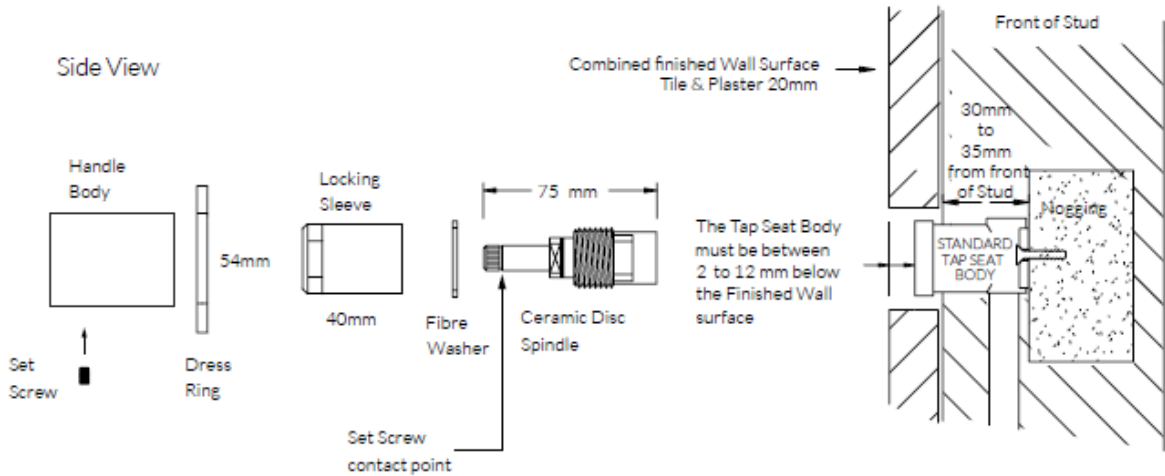

ROUGH IN (NEW WALL BREECH)

- A standard Wall Breach (not supplied) is to be used in conjunction with this Tapware.
- Prepare a noggin to be fitted 30 - 35mm back from the front of the stud for the fixing of the Wall Breach (as shown).
- When fixing the Breach to the noggin; ensure the Tap seats of the Breach will be level and square to the Finish Wall.
- To ensure the Tapware will fit correctly the thickness of the finished Wall coverings must be calculated prior to "Rough in".
- When using thicker than normal Wall covering, position the breach as forward as possible to ensure the Tapware will fit.

USING EXISTING BREECH (CHANGING TAPWARE ONLY)

- Remove the old Spindles and clean surrounding area.
- When installing new Spindles into old Breaching, it is highly recommended to use a re-seating tool to dress the Seat.
- Ensure the Spindle Seat is clean, flat and free of any debris.
- All lines must be completely flushed prior to fitting the Spindles.
- The distance from the finished Wall surface to the top of the Tap Seat must be between 2 to 12mm (See diagram)
- If the installation configuration is not within the dimensions as shown, alternative Spindles are available.
- Longer Spindles can be ordered from original place of purchase.
- NOTE: Seat or Breach Body extensions are NOT to be used in conjunction with this Tapware - Failure to adhere will void warranty.

FITTING OFF

- Upon receiving, carefully unpack the Tapware; note some parts have been combined for packaging purposes.
- Separate parts as shown in diagram. The Spindles are supplied with Hot and Cold indication.
- Install the Spindles hand-tight until the seal of the Spindle makes contact with the seat.
- To ensure a good seal is made; tighten the Spindle slightly more using an appropriate spanner. Do not over-tighten.
- Note, over-tightening the Spindles could damage the ceramic discs and in turn, void the manufacturer's warranty.
- Place the Fibre washer over the seated Spindle and fit the Locking Sleeve. (Tighten well).
- Seal the wall around the Locking Sleeve and immediately fit the Dress Ring.
- Fit the Handle Body, the Handle Body must be fully engaged onto the Spindle; note the Set Screw contact point. (See diagram)
- A mild adhesive can be applied to the Set screw when securing to the spindle.
- Secure the Handle body by tightening the Set screw using the 2mm Allen key provided. (Tighten well)
- After completing the installation, establish water supply, check function of Tapware and ensure no water leaks.