
SUSSEX



Product Code: DUT-09

Duet Basin Sink Hob Mixer Set High

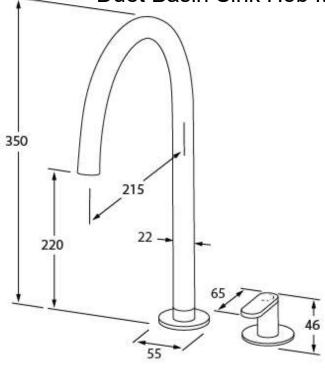

Product features

- Designed and manufactured in Australia
- All brass construction
- Swiveloutlet
- Progressive mixer brass cartridge
- Available in a range of high quality, durable finishes inc. LUXPVD*
- Minimal, refined design to complement any contemporary space
- Matching tapware and showers

Warranty

15 Year overall warranty. Refer to Warranty sheet for specific information.

Pressure rating

300 - 500kPa

Temperature rating

1-65°C

WELS rating

6star - 4.5lt/min








www.acsbathrooms.com.au

As part of ACS commitment to quality products. Information provided in this data sheet is representative of the actual product available at the time of printing. Due to our commitment to continuous product design and development, the designs and specifications depicted are subject to change without notice. Please confirm all particulars with your ACS sales consultant prior to purchase. Each product is covered by a limited warranty. Please see our website for full terms and conditions. This drawing remains the property of ACS and should not be copied or distributed without ACS consent. © 2010 All Dimensions are approximate in mm and are not to scale.

SUSSEX

Product Code: DUT-09

Duet Basin Sink Hob Mixer Set High

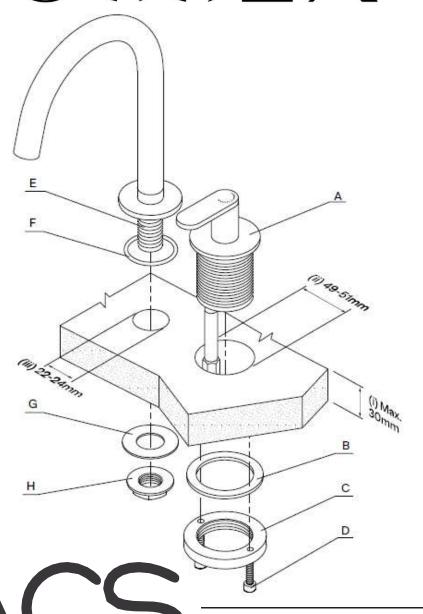

Install Preparation:

- Maximum Mounting Surface thickness is 30mm. (i)
- Hob Mixer: 49mm 51mm Clearance Hole. (ii)
- Outlet: 22mm 24mm Clearance Hole. (iii)
- Mounting Surface must be flat and level.
- Prior to installing remove:
 - (B) Clamping Ring
 - (C) Clamping Plate
 - (F) Outlet Washer
 - (G) Locknut

Product parts:

- (A) Hob Mixer
- (B) Clamping Ring
- (C) Clamping Plate
- (D) Fixing Screws
- (E) Outlet
- (F) O-Ring
- (G) Outlet Washer
- (H) Locknut

Plumbers note:

- Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2021
- Recommended working water pressure 300 500 Kpa. Maximum water temperature is 65°C
- After installation, ensure that tapware functions correctly without leaks.
- Please ensure a copy of the Installation Instructions are left with the end user for future reference.



1300 898 889

www.acsbathrooms.com.au