


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Circa Basin Set

Product code: CIR-16 Available options: Basin Set

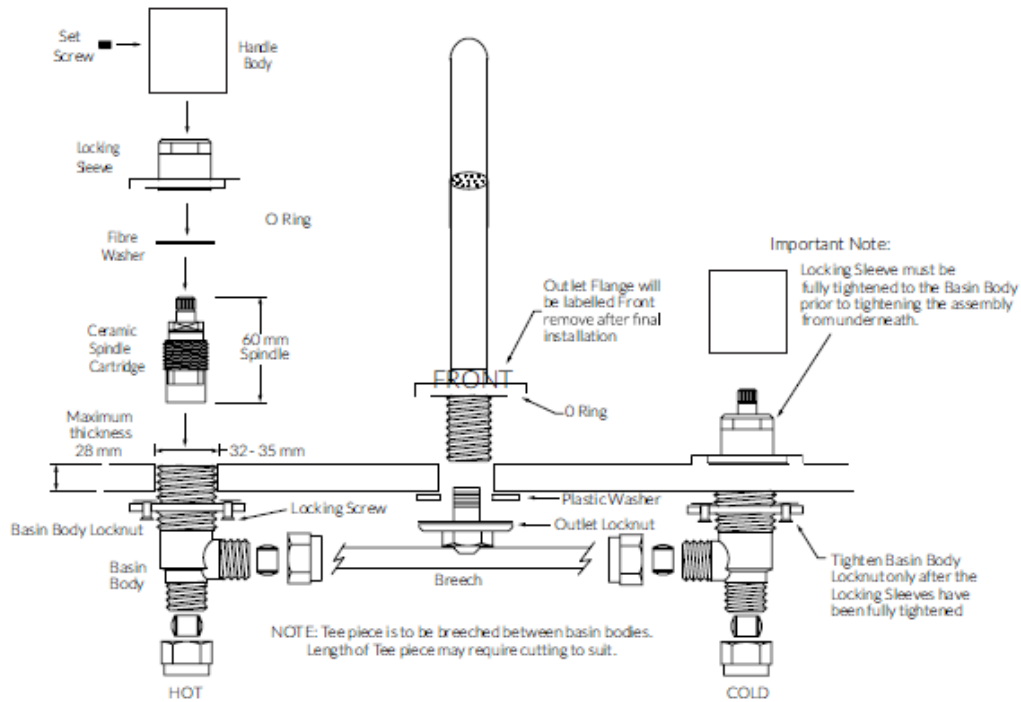

INSTALLATION GUIDELINES

- The Spindles will be supplied fitted into the Basin Bodies when supplied.
- Determine the distance of the Basin/Hob holes and cut the breach to suit.
- Place the Outlet Locknut and Plastic Washer over the outlet fitting of the Breach.
- Align the breached Basin Bodies and fit through the mounting surface.
- Fit the Fibre Washer over the spindles.
- Raise the assembled Basin Body through the mounted surface and fit the Locking Sleeves.
- Fully tighten Locking Sleeves and ensure O Ring is intact before lowering assembly onto mounting surface. (See Fig.1)
- Working from underneath tighten the Basin Body Locknut to secure the assembly.
- Outlet must be secured with the FRONT label facing the user.
- Remove label after final installation.
- Fit the Outlet to Breach and secure by tightening the locknut, ensure O Ring is intact.
- Once all parts are tightened fit Handle and secure with Set Screw using Allen Key.
- Connect Hot and Cold feed lines to the Basin Bodies.
- Check all parts, fittings and connections for any water leaks.

Fig.1

